




Copeland Compressor



SANHUA Electronic Expansion Valve



Hydrophilic Aluminum Finned Evaporator

Model: NE-F	325HCR3TEVI-U	450HCR3TEVI-U	860HCR3TEVI-U	1680HCR3TEVI-U	2660HCR3TEVI-U
Power Supply (V/Ph/Hz)	380-415V/3Ph/50Hz	380-415V/3Ph/50Hz	380-415V/3Ph/50Hz	380-415V/3Ph/50Hz	380-415V/3Ph/50Hz
Operating Range (°C)	-25~43	-25~43	-25~43	-25~43	-25~43
Max.Outlet Water Temp.(°C)	60	60	60	60	60
Ambient Temperature: (DB/WB) 7°C/6°C; Water Inlet/Outlet Temperature : 40°C/45°C.					
Heating Capacity (kW)	32.7	45	86	168	266
Power Input (kW)	9.09	12.8	24.5	45.7	76.5
Ambient Temperature: (DB/WB) -12°C/-14°C; Water Inlet/Outlet Temperature : 41°C.					
Heating Capacity (kW)	20.5	31	55	114	172
Power Input (kW)	8.36	11.92	22.36	45	71
Ambient Temperature: (DB/WB) 35°C/-; Water Inlet/Outlet Temperature : 12°C/7°C.					
Cooling Capacity (kW)	23.2	35	65	130	191
Power Input (kW)	8.35	12.2	23.8	46.6	68
Max. Power Input (kW)	13.5	19	36	71	121
Max. Running Current (A)	25	34	65	131	236
Water Flow (m³/h)	4	6.1	11.2	22.4	32.5
Refrigerant Type	R410A	R410A	R410A	R410A	R410A
Water Pressure Drop (kPa)	60	40	45	60	70
Water Pipe Connection (inlet/outlet)	G1-1/4" (Male)	G1-1/2" (Male)	2-1/2" (Flange)	2-1/2"(Flange)	3"(Flange)
Sound Pressure at 1m dB(A)	≤64	≤68	≤69	≤75	≤85
Net Dimensions L*W*H (mm)	1555*870*1322	1500*860*1430	1954*957*2021	2400*1300*2260	2400*2100*2400
Net Weight (kg)	270	390	670	1280	1800

● Notice:  
The above data is for reference only, the specific data is subject to actual product.

# SUNRISE SERIES


Commercial EVI Heating&Cooling Heat Pump

Designed for cold climate area  
Works stably under extra low temperature as -25°C



# Solution for Large-scale Heating, Cooling and Sanitary Hot Water

Applied to some large-scale public places in cold climate area for heating and cooling.

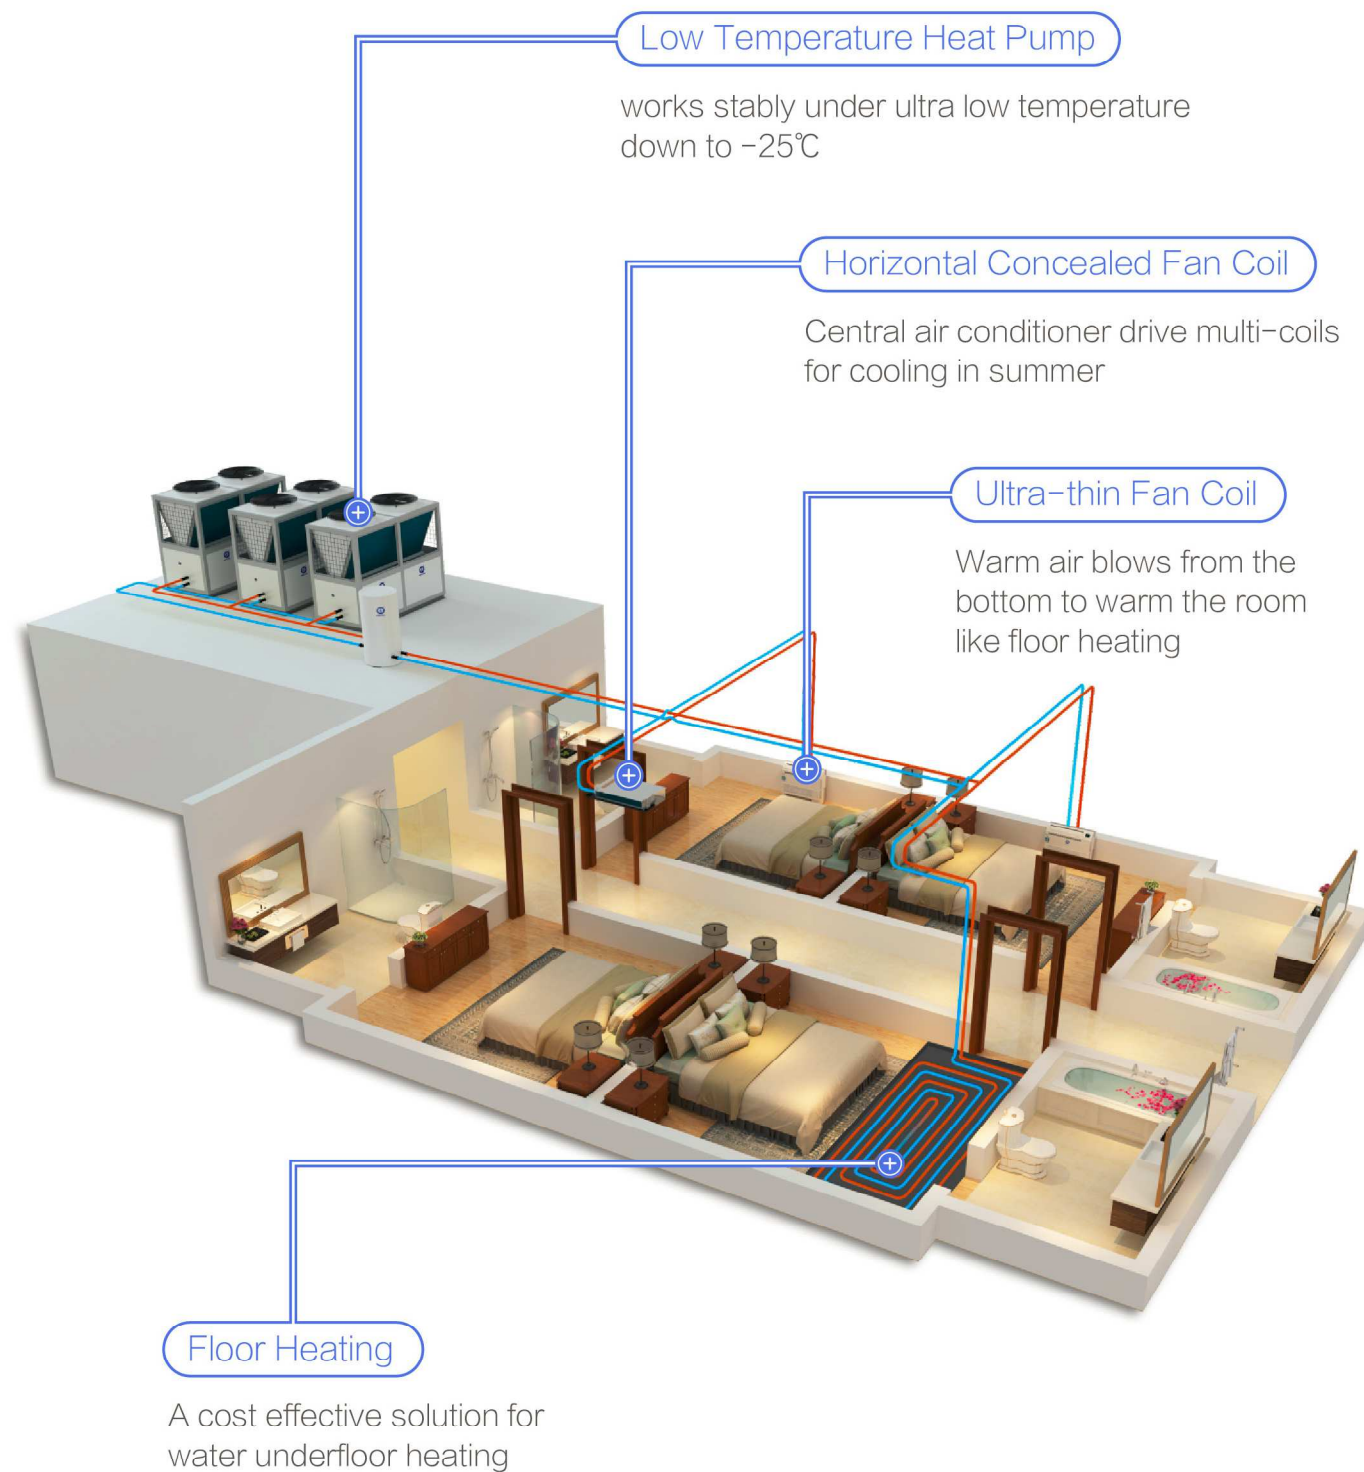

# Advantages of Sunrise Series(EVI)

